

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

Part Number	VRRM (V)	I _F (AV) @ T _C		I _{FSM} (1)		V _{FM} @ $\pi \times I_F(AV) (V)$	R _{th} JC DC (°C/W)	PR (2) (°C/W)	Case Outline Number (5)	Notes	Case Style				
		(A)	(°C)	50 Hz (A)	60 Hz (A)										
A6F40 A6F60 A6F80 A6F100 A6F120	400 600 800 1000 1200	6	158	134	141	1.10	2.50	4	R6	(3) (4)					
A12F40 A12F60 A12F80 A12F100 A12F120	400 600 800 1000 1200														
A16F40 A16F60 A16F80 A16F100 A16F120	400 600 800 1000 1200														
A25F40 A25F60 A25F80 A25F100 A25F120	400 600 800 1000 1200														
40HA40 40HA60 40HA80 40HA100 40HA120 40HA140 40HA160	400 600 800 1000 1200 1400 1600	40	140	480	500	1.30	1.00	11							
			110												
70HA40 70HA60 70HA80 70HA100 70HA120 70HA140 70HA160	400 600 800 1000 1200 1400 1600	70	140	1000	1050	1.35	0.45	20							
			110												


(1) 100% VRRM reapplied.

(2) 10 μ s square pulse, $T_j = T_j$ max.

(3) Cathode-to-stud. For anode-to-stud, add "R" to basic Part number (e.g., A12FR100).

(4) Available with metric stud; to specify add "M" to the end of part number (e.g., 40HA14CM, A12F100M).

R7 A

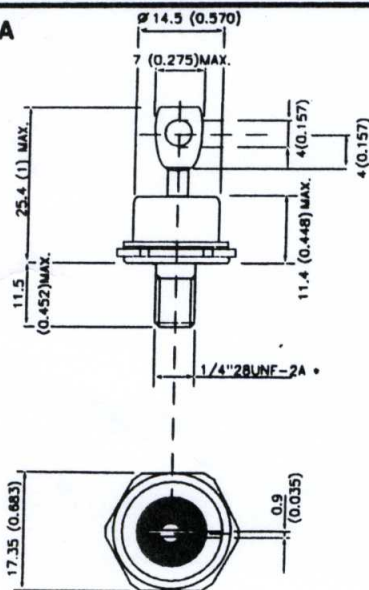

* FOR METRIC DEVICES: M6 x 1

