

Proximity Sensors Capacitive Thermoplastic Polyester Housing Type EC, M30, DC

TRIPLESIELD™

CARLO GAVAZZI



- Featuring **TRIPLESIELD™** Sensor protection
- Rated operational voltage: 10-40 VDC
- Adjustable sensing distance 2-16 mm or 4-25 mm
- Output: DC 200 mA, NPN or PNP
- Make and break switching function
- LED indication
- High noise immunity
- Flush and non-flush types
- Plug and Cable versions available
- AC versions in the same housing

Product Description

Capacitive proximity switches with either sensing distance 16 mm flush mounted in metal or sensing distance 25 mm non-flush mounted. 4-wire DC output with

both make (NO) and break (NC) switching. Grey M30 polyester housing with 2 m PVC cable or plug. Ideal for use in level and plastic machinery applications.

Ordering Key

EC 3025 NPA P L-1

Capacitive proximity switch
Housing diameter (mm) _____
Rated operating dist. (mm) _____
Output type _____
Housing material _____
Housing type _____
Connection type _____

Type Selection

Housing diameter	Rated operating dist. (S _n) ¹⁾	Mounting	Ordering no. Transistor NPN/cable Make & break switching	Ordering no. Transistor NPN/plug Make & break switching	Ordering no. Transistor PNP/cable Make & break switching	Ordering no. Transistor PNP/plug Make & break switching
M30	16 mm	Flush (built-in)	EC 3016 NPAPL	EC 3016 NPAPL-1	EC 3016 PPAPL	EC 3016 PPAPL-1
M30	25 mm	Non-flush	EC 3025 NPAPL	EC 3025 NPAPL-1	EC 3025 PPAPL	EC 3025 PPAPL-1



¹⁾ Object: Grounded steel plate

Specifications

Rated operating dist. (S_n) 3016: 3025:	2 to 16 mm factory set at 16 mm 4 to 25 mm factory set at 25 mm	Frequency of operating cycles (f)	50 Hz
Sensitivity	Adj. multiturn pot.meter	Indication for output ON	LED, yellow
Effective operating dist. (S_r)	$0.9 \times S_n \leq S_r \leq 1.1 \times S_n$	Environment Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
Usable operating dist. (S_u)	$0.8 \times S_r \leq S_u < 1.2 \times S_r$	Temperature Operating temperature Storage temperature	-25 to +80°C (-13 to +176°F) -40 to +85°C (-40 to +185°F)
Repeat accuracy (R)	≤ 5%	Housing material Body Cable end Nuts	Grey thermoplastic polyester Polyester Black reinforced nylon
Hysteresis (H)	3 to 20% of sensing distance	Connection Cable Plug (-1) Cable for plug (-1)	Grey, 2 m, 4 x 0.34 mm ² Oil proof, PVC M12 x 1 CON.1A-series
Rated operational volt. (U_B)	10 to 40 VDC (ripple included)	Weight (incl. nuts)	3016: 140 g 3025: 150 g
Ripple	≤ 10%	Approvals	UL, CSA
Rated operational current (I_B) Continuous	≤ 200 mA	CE-marking	Yes
No-load supply current (I₀)	≤ 10 mA (no load)		
Voltage drop (U_d)	≤ 2.5 VDC at max. load		
Protection	Reverse polarity, short-circuit, transients		





Dimensions

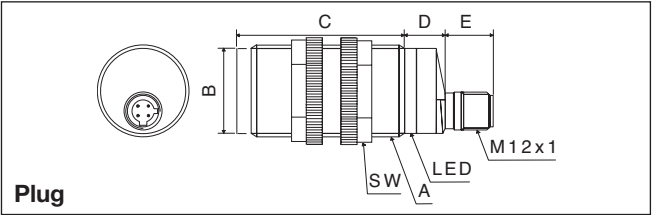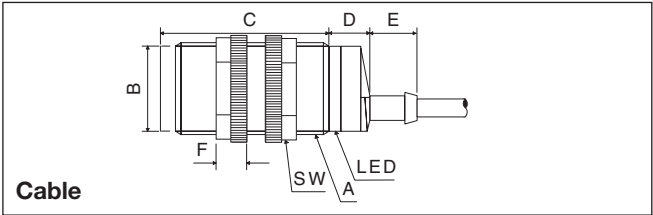

Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
EC 3016xPAPL(-1)	M 30 x 1.5 x 50	28	50	13.6	15.4	10	36
EC 3025xPAPL(-1)	M 30 x 1.5 x 50	28	62	13.6	15.4	10	36

Wiring Diagrams

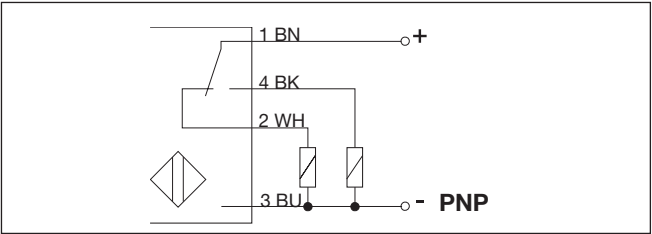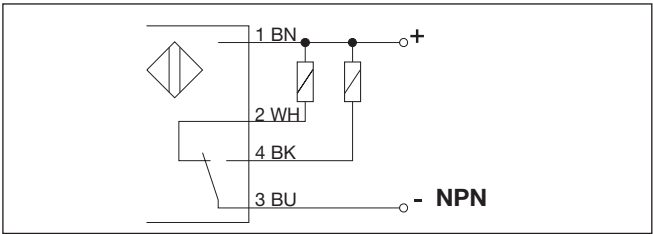

Adjustment Guide

The environments in which capacitive sensors are installed can often be unstable regarding temperature, humidity, object distance and industrial (noise) interference. Because of this, Carlo Gavazzi offers as standard features in all **TRIPLESIELD™** capacitive sensors a user-friendly sensitivity adjustment instead of having a fixed sensing range, extended sensing range to

accommodate mechanically demanding areas, temperature stability to ensure minimum need for adjusting sensitivity if temperature varies and high immunity to electromagnetic interference (EMI).

Note:
Sensors are factory set (default) to maximum rated sensing range.

**EC3016xPAPL(-1)
EC3025xPAPL(-1)**

Sensitivity Adjustment (4-wire device backview)

Max. Sensitivity
Min.





Installation Hints

Capacitive sensors have the unique ability to detect almost all materials, either in liquid or solid form. Capacitive sensors can detect metallic as well as non-metallic objects, however, their traditional use is for non-metallic materials such as:

- **Plastic Industry**
Resins, regrinds or moulded products.
- **Chemical Industry**
Cleansers, fertilisers, liquid soaps, corrosives and petrochemicals.
- **Wood Industry**
Saw dust, paper products, door and window frames.
- **Ceramic & Glass Industry**
Raw material, clay or finished products, bottles.
- **Packaging Industry**
Package inspection for level or contents, dry goods, fruits and vegetables, dairy products.

Materials are detected due to their dielectric constant. The bigger the size of an object, the higher the density of material, the better or easier it is to detect the object. Nominal sensing distance for a capacitive sensor is referenced to a grounded metal plate (ST37). For additional information regarding dielectric ratings of materials please refer to Technical Information.

Installation Hints (cont.)

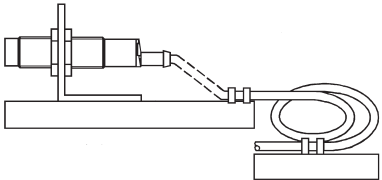To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables 	Relief of cable strain  The cable should not be pulled	Protection of the sensing face  A proximity switch should not serve as mechanical stop	Switch mounted on mobile carrier  Any repetitive flexing of the cable should be avoided
---	---	--	--

Delivery Contents

- Capacitive switch: EC 30.. PAPL(-1)
- Screw driver
- 2 nuts
- **Packaging:** Cardboard box
- Installation & Adjustment Guide

Accessories

- Plugs CON.1A.. serie.